

# Power/Audio Combined Cable


## Application

- Put together the power cable and the audio cable.
- For powered speakers.

## Features

- Compliant with <PS>E.
- The speaker line is double shielded for noise reduction.
- Soft and flexible. Easy handling.

## Configuration

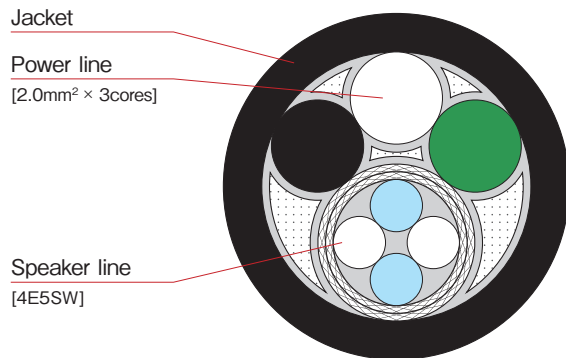

## Construction/Properties

Model	Unit Construction							Finished cable construction	
	Construction	Line model	Conductor		Insulation OD mm	Shield	Unit OD mm	OD mm	Weight kg / 100 m
			Structure Wires/mm	Size mm <sup>2</sup>					
T-AS203PA	Speaker Line	T-4E5SW	30/0.08A	0.15	1.12	Double braided	5.3	14.1	26.4
	Power Line	VCT 2.0mm x 3	7/57/0.08A	2.0	3.7	—	—		