

UL Recognized

# UL Approved Coaxial Cable Style 1107, 1354, 1365

## Applications/Features


- For high frequency devices.
- For UL standard required equipment.
- UL recognized(AWM)
- Compliant with RoHS2.

## Standard

- Standard

	UL AWM	UL AWM	UL AWM
Standard	UL758	UL758	UL758
Style/Type	Style 1107	Style 1354	Style 1365
Rated Voltage	300V	30V	300V
Rated Temp.	60°C	80°C	60°C
Flame Retardance	VW-1	VW-1	VW-1

## Construction/Properties

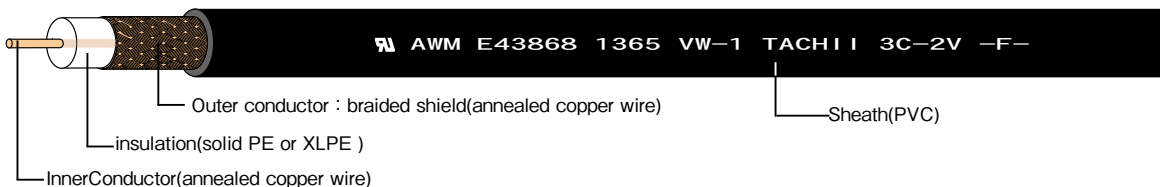

UL AWM Style	Model	Inner conductor	Insulation	Braided shield	Sheath		Conductor resistance (20°C)	Insulation resistance (20°C)	Capacitance	Characteristic impedance	Standard attenuation (20°C)	Weight
		Construction			OD	Color						
		No./mm	mm	S/No./mm	mm		Ω /km	M Ω ·km	nF/km	Ω /km	dB/km	kg/km
1107	1.5D-2VSX	7/0.18	1.6	16/5/0.10	2.9	Gy	110 or under	1000 以上	104	50 ± 2	85	16
1354	1.5C-2VSX	7/0.10	1.6	16/5/0.10	2.9	Bk	326 or under	1000 以上	69	75 ± 3	85	13
	1.5D-2VSX	7/0.18	1.6	16/5/0.10	2.9	Wh	100 or under	1000 以上	104	50 ± 2	85	16
1365	2C-2V	7/0.12	1.9	16/4/0.12	3.2	Bk	262 or under	1000 以上	96	75 ± 3	96	17
	3C-2V	1/0.5	3.1	16/6/0.12	5.4	Bk	91.4 or under	1000 以上	42	75 ± 3	41.7	42
	3C-2VS	7/0.18	3.1	16/6/0.12	5.4	Bk	100 or under	1000 以上	48	75 ± 3	48	42