


# Coaxpress Certified Coaxial Cable

## Applications/Features


- Due to the uncompressed transmission, large-capacity image data can be transmitted over a long distance with low delay.
- TCXPL is for fixed type and PCXLH is movable type.
- Movable type is enough flexible to withstand repetition of installing and removing.
- The product will be delivered with the connectors attached with your preferred length.
- BNC, micro BNC and DIN connectors are available.
- Coaxpress standard(one of the machine vision standards) certified.
- Compliant with RoHS2.

## Model

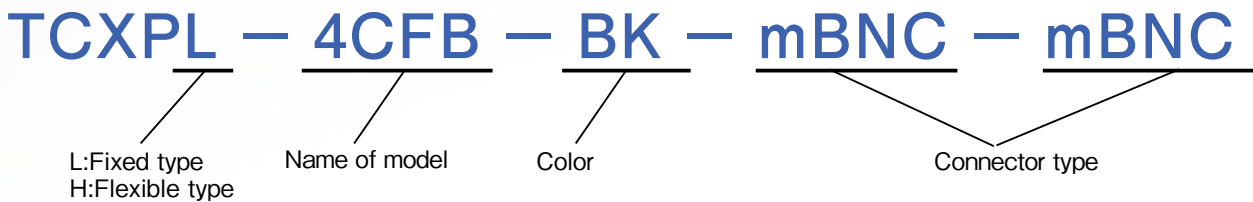

※ This cable is connector assembled.

## Construction/Properties

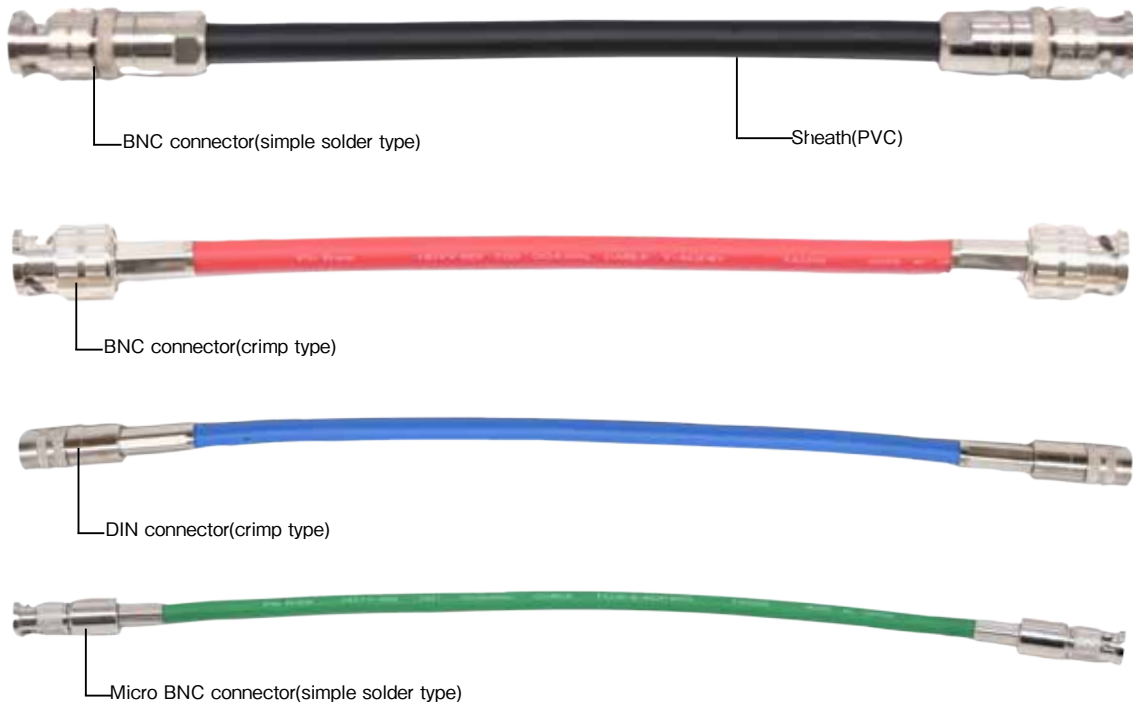

## Coaxpress Certified Coaxial Cable

### • Fixed type

Model	OD	Connector	transmission distance	
			CXP-12	CXP-6
TCXPL-3CUHD-**-BNC-BNC	5.5mm	BNC-BNC	23m	—
TCXPL-3CHD-**-BNC-BNC	5.5mm	BNC-BNC	—	30m
TCXPL-4CFB-**-BNC-BNC	5.9mm	BNC-BNC	24m	30m
TCXPL-4CFB-**-mBNC-mBNC	5.9mm	microBNC- microBNC	24m	30m
TCXPL-4CFB-**-BNC-mBNC	5.9mm	BNC-microBNC	24m	30m
TCXPL-4CFB-**-DIN-DIN	5.9mm	DIN-DIN	—	30m
TCXPL-4CFB-**-BNC-DIN	5.9mm	BNC-DIN	—	30m
TCXPL-5.5CUHD-**-BNC-BNC	7.7mm	BNC-BNC	39m	—
TCXPL-5CHD-**-BNC-BNC	7.7mm	BNC-BNC	—	45m

- \*\* = color.
- This cable is connector assembled (as above).

### • Flexible type

Model	OD	Connector	transmission distance	
			CXP-12	CXP-6
TCXPH-2.4CFWS-**-BNC-BNC	4.0mm	BNC-BNC	11m	15m
TCXPH-2.4CFWS-**-mBNC-mBNC	4.0mm	microBNC- microBNC	11m	15m
TCXPH-2.4CFWS-**-BNC-mBNC	4.0mm	BNC-microBNC	11m	—
TCXPH-2.8CFWS-**-BNC-BNC	4.4mm	BNC-BNC	13m	18m
TCXPH-3CFWS-**-BNC-BNC	5.8mm	BNC-BNC	14m	19m
TCXPH-5CFWS-**-BNC-BNC	7.7mm	BNC-BNC	22m	30m

- \*\* = color.
- This cable is connector assembled (as above).

## Coaxial Cable with Connectors

