

2-Core Shielded Multiple Cable


Application

- 2-core shielded audio signal cable for fixed wiring. Supporting multi-channel.

Features

- Color codes(10 colors) on the both sides of unit sheath(black/gray/blue) makes unit identification easy.
- Core has the same color as unit identification line. Users can understand easily.
- Eco type is also available.

Configuration

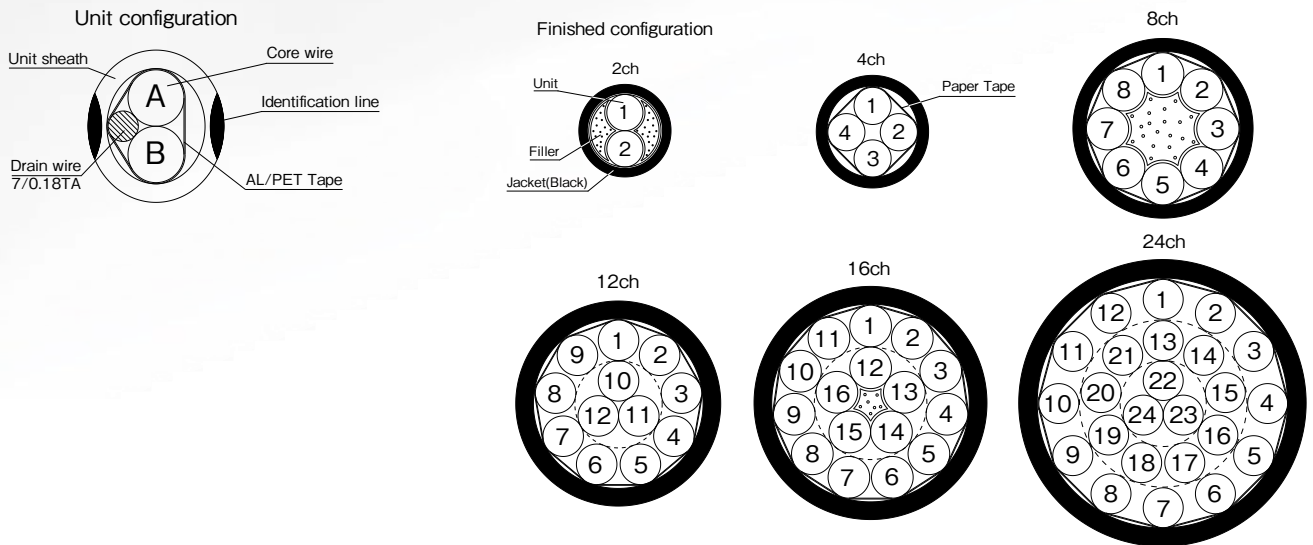

<Marking Example of Number of Unit Configuration : 12>

Pb free TMR202-12AT TACHII MADE IN JAPAN

Construction/Properties

Model	Conductor		Insulation	Unit structure		Layer stranded		Finished cable	Electrical specification	
	Structure Wires/mm	Size mm ²	OD mm	Twisted pitch mm	OD mm	Pitch mm	OD mm	OD mm	Conductor resistance Ω / km	Line capacity p F / m
TMR202-2AT	7/0.18TA	0.18 (AWG25)	1.0	21	2.7	75	5.4	6.8	114 or under	70 (1kHz)
TMR202-4AT						75	6.4	7.9		
TMR202-8AT						140	9.6	11.2		
TMR202-12AT						200	10.6	12.8		
TMR202-16AT						200	12.3	14.5		
TMR202-24AT						280	15.6	17.9		

Unit Configuration

ch	Insulation color		Sheath color / Line color	ch	Insulation color		Sheath color / Line color	ch	Insulation color		Sheath color / Line color	ch	Insulation color		Sheath color / Line color
	A	B			A	B			A	B			A	B	
1	Bw	Cl	Bk/Bw	7	Pu	Cl	Bk/Pu	13	Or	Cl	Gy/Or	19	Wh	Cl	Gy/Wh
2	Re	Cl	Bk/Re	8	Gy	Cl	Bk/Gy	14	Ye	Cl	Gy/Ye	20	Bk	Cl	Gy/Bk
3	Or	Cl	Bk/Or	9	Wh	Cl	Bk/Wh	15	Gr	Cl	Gy/Gr	21	Bw	Cl	Bl/Bw
4	Ye	Cl	Bk/Ye	10	Bk	Cl	Bk/-	16	Bl	Cl	Gy/Bl	22	Re	Cl	Bl/Re
5	Gr	Cl	Bk/Gr	11	Bw	Cl	Gy/Bw	17	Pu	Cl	Gy/Pu	23	Or	Cl	Bl/Or
6	Bl	Cl	Bk/Bl	12	Re	Cl	Gy/Re	18	Gy	Cl	Gy/-	24	Ye	Cl	Bl/Ye