

PVC-SP 0.2mm² ~ 0.75mm²

用途・特徴


- 機内及び機器間配線用として使用できます。
- ノイズ対策に横巻きシールドを施しております。
- RoHS2指令に準拠しております。

規格

●対応規格表

	当社標準
適用規格	—
型式・タイプ	—
定格電圧	60V
定格温度	60℃
難燃性	JIS 60°傾斜

構造・特性

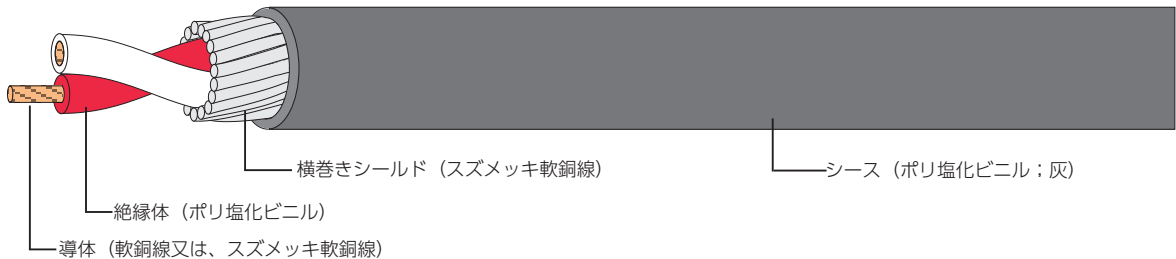

型式	導体			絶縁体		シース		概算 質量 kg/km	導体 抵抗 (20℃) Ω /km	絶縁 抵抗 (20℃) MΩ・km	耐電圧 V・1 分間	許容 電流 (30℃) A	製品 条長 m
	断面積 mm ²	構成 本 /mm	外径 mm	厚さ mm	外径 mm	厚さ mm	仕上 外径 mm						
0.2mm ² T × 1C	0.2	7/0.18	0.5	0.30	1.1	0.33	2.0	8	113 以下	5 以上	AC500	3.8	100 (束)
0.2mm ² T × 2C				0.25	1.0	0.43	3.1	15				3.1	
0.2mm ² T × 3C						0.48	3.5	21				2.7	
0.3mm ² × 1C	0.3	12/0.18	0.7	0.40	1.5	0.38	2.5	13	62.9 以下	5 以上	AC500	5.9	200 (束)
0.3mm ² × 2C						0.38	4.0	23				4.8	100 (束)
0.3mm ² × 3C						0.48	4.5	33				4.2	
0.5mm ² × 1C	0.5	20/0.18	0.9	0.55	2.0	0.38	3.0	18	37.8 以下	5 以上	AC500	8.7	100 (束)
0.5mm ² × 2C						0.43	5.1	35				7.1	
0.5mm ² × 3C						0.48	5.6	48				6.2	
0.75mm ² × 1C	0.75	30/0.18	1.1	0.55	2.2	0.38	3.2	23	25.1 以下	5 以上	AC500	11.2	100 (束)
0.75mm ² × 2C						0.53	5.7	55				9.2	
0.75mm ² × 3C						0.53	6.0	68				8.0	

・線心配列は、線心配列表・配列図のパターン② (P.53) 参照。

線心識別表・配列図

【パターン②】層撚り (C) 配列 EM-MEES、SOFTEC MIC CORD、PVC-SP

心	No.	1	2	3	4	5	6	7	8	9	10
絶縁体	下地	黒	白	赤	緑	黄	青	茶	紫	灰	橙
色相	パターン										



計装用ケーブル（一般）