

Jeep Cable for Relay <Series RJP>


Application

- For 3G-SDI/HD-SDI.
- Transmit multiple signals by a single cable.

Features

- For 3G-SDI/HD-SDI.
- Put multiple wires into a single cable.
- Easy to install and remove.
- We can produce cable harness with BNC connectors. Ask our sales staff for details.

Unit Configuration

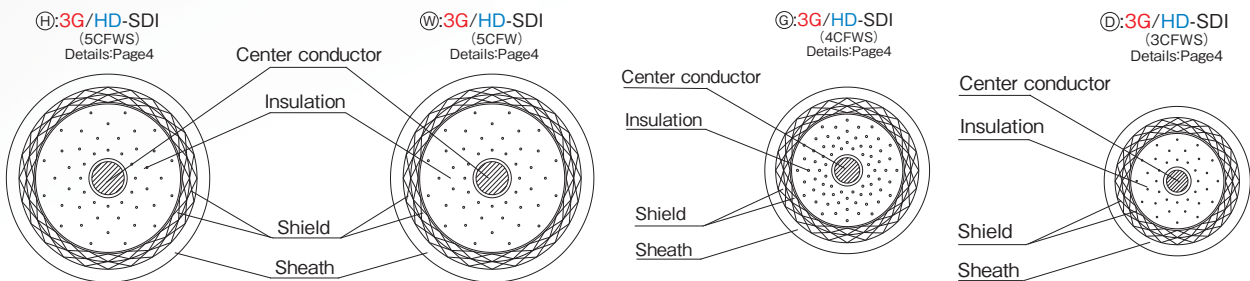

Structure

Model	Unit structure			Layer stranded		Finished cable	
	Unit OD (mm)			Pitch mm	OD mm	OD mm	Weight kg
	6.8	5.8	4.7				
	H :5CFWS W :5CFW	4CFWS	3CFWS				50 m
RJP3-3CFWS				abt.200	10.2	12.4	9.3
RJP4-3CFWS				abt.225	11.5	14.1	12.3
RJP5-3CFWS				abt.235	13.0	15.7	14.9
RJP6-3CFWS				abt.255	14.3	17.3	18.4
RJP10-3CFWS				abt.350	19.1	22.9	31.0
RJP3-4CFWS				abt.240	12.5	15.2	13.6
RJP4-4CFWS				abt.285	14.0	17.0	17.5
RJP5-4CFWS				abt.290	15.6	18.9	21.8
RJP8-4CFWS				abt.380	19.1	22.9	32.4
RJP3-5CFWS				abt.285	14.9	18.2	19.2
RJP4-5CFWS				abt.320	16.7	20.2	23.9
RJP5-5CFWS				abt.350	18.6	22.4	29.1
RJP5-5CFW				abt.350	18.6	22.4	29.1

Finished Cable Configuration

SDI unit	3-core type	4-core type	5-core type	6-core and more
3CFWS unit	<p>RJP3-3CFWS</p> <p>φ12.4mm</p>	<p>RJP4-3CFWS</p> <p>φ14.1mm</p>	<p>RJP5-3CFWS</p> <p>φ15.7mm</p>	<p>RJP6-3CFWS</p> <p>φ17.3mm</p> <p>RJP10-3CFWS</p> <p>φ22.9mm</p>
4CFWS unit	<p>RJP3-4CFWS</p> <p>φ15.2mm</p>	<p>RJP4-4CFWS</p> <p>φ17.0mm</p>	<p>RJP5-4CFWS</p> <p>φ18.9mm</p>	<p>RJP8-4CFWS</p> <p>φ22.9mm</p>
5CFWS unit or 5CFW unit	<p>RJP3-5CFWS</p> <p>φ18.2mm</p>	<p>RJP4-5CFWS</p> <p>φ20.2mm</p>	<p>RJP5-5CFWS</p> <p>φ22.4mm</p> <p>RJP5-5CFW</p> <p>φ22.4mm</p>	